


**BUTT-WELD**

**SCHEDULE 160**

**XXS**

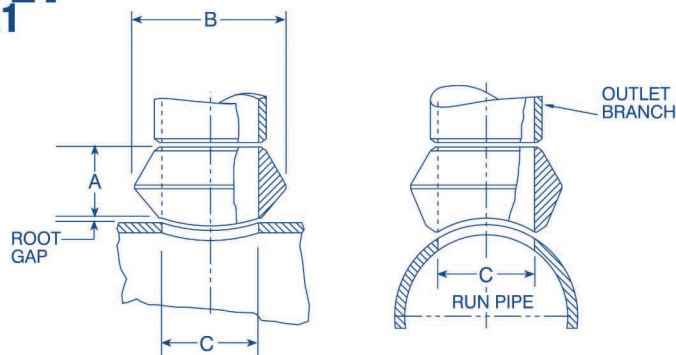

Schedule 160	Outlet Size Inches	Dimensions			Appx. Weight Pounds
		A	B	C*	
	1/2	1-1/8	1-1/4	0.464	0.24
	3/4	1-1/4	1-1/2	0.612	0.39
	1	1-1/2	1-3/4	0.815	0.62
	1-1/4	1-3/4	2-1/4	1.160	1.16
	1-1/2	2	2-3/4	1.338	1.80
	2	2-3/16	3	1.689	2.29
	2-1/2	2-7/16	4	2.125	3.02
	3	2-7/8	4-7/16	2.624	6.34
	4	3-5/16	5 -3/8	3.438	9.94
	6	4-1/8	8-1/2	5.187	25.25

XXS	Outlet Size Inches	Dimensions			Appx. Weight Pounds
		A	B	C*	
	1/2	1-1/8	1-1/4	0.252	0.23
	3/4	1-1/4	1-1/2	0.434	0.65
	1	1-1/2	1-3/4	0.599	0.78
	1-1/4	1-3/4	2-1/4	0.896	1.16
	1-1/2	2	2-3/4	1.100	1.60
	2	2-3/16	3	1.503	2.46
	2-1/2	2-7/16	4	1.771	3.02
	3	2-7/8	4-7/16	2.300	6.91
	4	3-5/16	5 -3/8	3.152	11.00
	6	4-1/8	8-1/2	4.897	32.94

Each outlet size listed is available to fit any run curvature.

BW Ends per B16.9 and B16.25. Design per MSS-SP-97.

**RUN PIPE SIZES** Outlet sizes 6" and less fit a number of run pipe sizes, and the fittings are marked accordingly. See page 30 for Pipet Consolidation Chart.

**SCHEDULES** Pipe schedule numbers and weight designations are in accordance with ASME B36.10.

**FLATS** A flat Butt-Weld Pipet fitting for use on welding caps, elliptical heads and flat surfaces is available.

**ORDERING** When ordering a fitting, see page 4.

Although every attempt has been made to insure that the information contained in these tables is correct, WFI reserves the right to change the "B" and "C" dimensions as deemed necessary.

\*The "C" dimension represents the waterway dimension of the fitting and does not include the minimal taper and radius required for manufacturing purposes. Installation holes in header should be based on actual fittings.