


Socket Weld

CL 3000

CL 6000

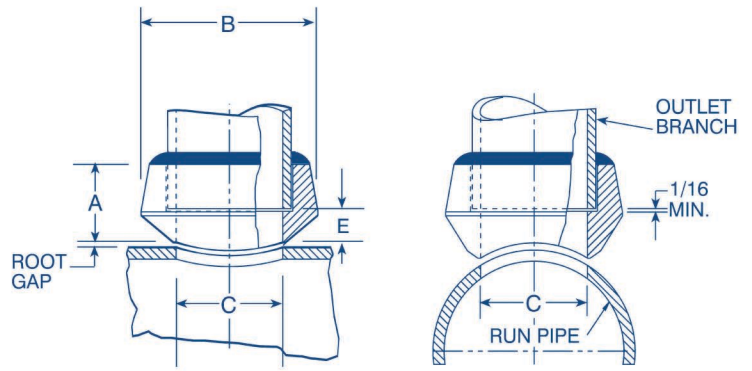

CL 3000	Outlet Size Inches	Dimensions				Appx. Weight Pounds
		A	B	C	E	
	1/4	3/4	7/8	0.364	3/8	0.14
	3/8	13/16	1-1/16	0.493	7/16	0.14
	1/2	1	1-1/4	0.622	9/16	0.28
	3/4	1-1/16	1-1/2	0.824	9/16	0.39
	1	1-5/16	1-7/8	1.049	25/32	0.73
	1-1/4	1-5/16	2-1/4	1.38	23/32	0.96
	1-1/2	1-3/8	2-1/2	1.61	3/4	1.12
	2	1-1/2	3	2.067	13/16	1.66

CL 6000	Outlet Size Inches	Dimensions				Appx. Weight Pounds
		A	B	C	E	
	1/2	1-1/4	1-3/8	.464	13/16	0.28
	3/4	1-7/16	1-3/4	.612	15/16	0.39
	1	1-9/16	2	.815	1-1/32	0.73
	1-1/4	1-5/8	2-1/2	1.16	1-1/32	0.96
	1-1/2	1-11/16	2-3/4	1.338	1-1/16	1.63
	2	2-1/16	3-3/8	1.687	1-3/8	1.66

Each outlet size listed is available to fit any run curvature.

Socket dimensions are in accordance with ASME B16.11.

Design per MSS-SP-97.

RUN PIPE SIZES Outlet sizes noted above fit a number of run pipe sizes, and the fittings are marked accordingly. See page 31 for Pipet Consolidation Chart.

FLATS A flat Socket-Weld Pipet for use on welding caps, elliptical heads and flat surfaces is available.

ORDERING When ordering a fitting, see page 4.

Although every attempt has been made to insure that the information contained in these tables is correct, WFI reserves the right to change the "B" and "C" dimensions as deemed necessary.